



ELECTROPUMP FOR SPAS

APPLICATIONS :

- HYDROMASSAGE PUMP FOR SPAS
- COUNTER-SWIM PUMP FOR POOLS AND SPAS

TECHNICAL FEATURES :

- PUMP BODY IN POLYPROPYLENE
- AVAILABLE IN SINGLE OR TWO SPEED
- 230V 50Hz
- IPX5 PROTECTION
- CLASS F INSULATION
- MOTOR 2 & 4 POLES
- RELATIVE HYGROMETRY UNTIL 95%


INLET :

- Ø EXT 2"

OUTLET :

- Ø EXT 2"

SINGLE SPEED PERFORMANCE CURVES

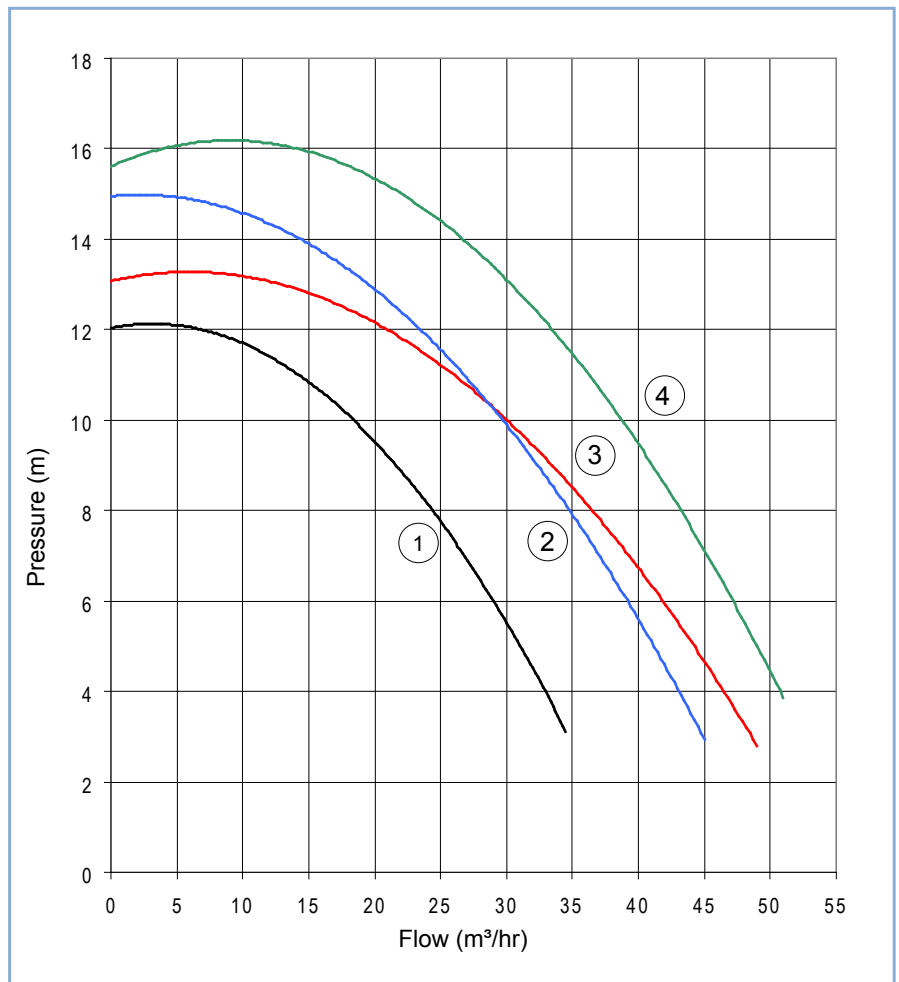

SINGLE SPEED TECHNICAL FEATURES

Curve	Single speed type	Input power (W)	Output power (W)	Intensity (A)	H [m]	14	12	10	8	6	4
					(m³/h)						
1	XP2e 1,5HP	1200	900	5,8	*	6	18,5	25	29	33	
2	XP2e 2HP	1600	1200	7,4	14	25	30	34	39	43	
3	XP2e 2,5HP	2000	1500	9,5	*	22	31	37	42	46,5	
4	XP2e 3HP	2500	1900	11,8	27	35	38,5	43	47	51	

OPTION :

ELECTRIC CABLE AND CONNECTOR ON DEMAND

GENERALS :


PUMPS DELIVERED WITH GASKET, UNION FITTINGS AND NUTS FOR INPUT AND OUTPUT, WITH UNION FITTINGS Ø60MM (Ø63MM AVAILABLE ON DEMAND)

CONFORM TO STANDARDS :


EN 60 335 - 1

EN 60 335 -2 - 41

CE




TWO SPEED PERFORMANCE CURVES

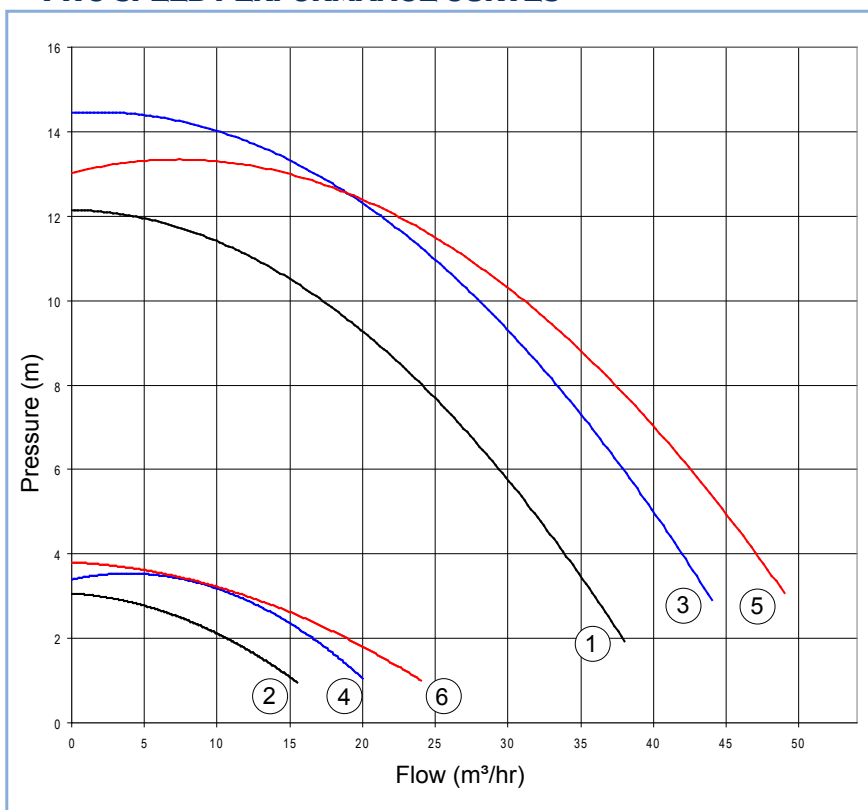

TWO SPEED TECHNICAL FEATURES

Curve	Two speed type	Input power (W)	Output power (W)	Intensity (A)	H [m]	12	10	8	6	4	3	2	1
						(m³/h)							
1	XP2e 1,5HP GV	1200	900	5,8		6	17	24	30	33	36	*	*
2	XP2e 1,5HP PV	320	160	1,4		*	*	*	*	*	4	10	15,5
3	XP2e 2HP GV	1600	1200	8		22	28	34	38	42	44	*	*
4	XP2e 2HP PV	400	190	1,8		*	*	*	*	*	11	17	20
5	XP2e 2,5HP GV	2200	1650	10		22	32	37	43	47	49	*	*
6	XP2e 2,5HP PV	440	220	1,9		*	*	*	*	*	12	19	24

BULK DIMENSIONS

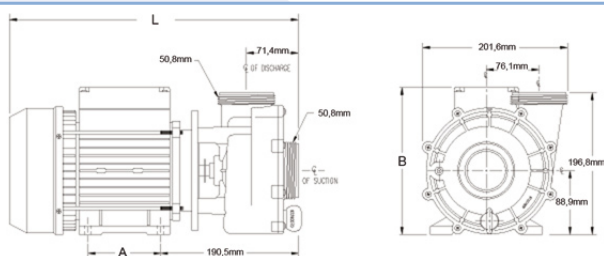

	L (mm)	A (mm)	B (mm)	Weight (kg)
XP2e 1,5HP	375	100	231	12,5
XP2e 1,5HP - 2speed	375	100	231	12,9
XP2e 2HP	375	100	231	14,2
XP2e 2HP - 2 speed	395	100	231	16,8
XP2e 2,5HP	395	100	231	16,8
XP2e 2,5HP - 2 speed	415	125	245	18,6
XP2e 3HP	415	125	245	19

CONNECTIONS DIAGRAM

